



3. Setup Guide


3.7 Installing Lawn Mower

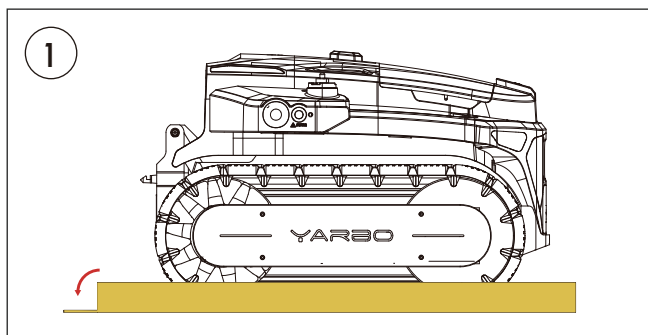


Cut the box along the cutting line on the bottom of the packaging box.

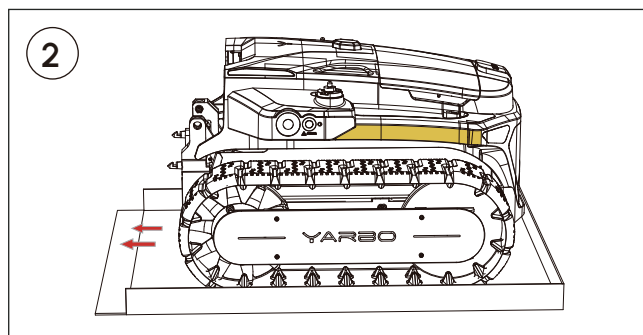

Grasp the lifting handles of the Yarbo Core and **push** the Yarbo Core out from the packaging box.

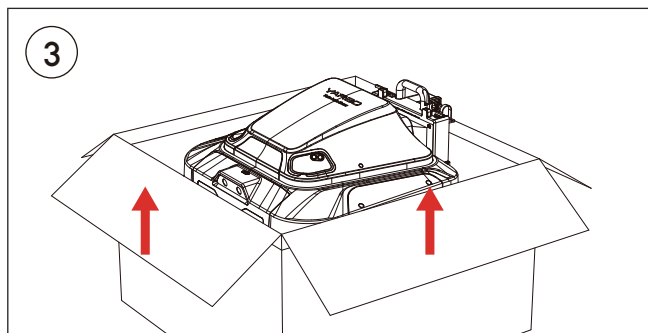


Carefully **lift** the Lawn Mower Module out of the packaging box by grasping the lifting handle.

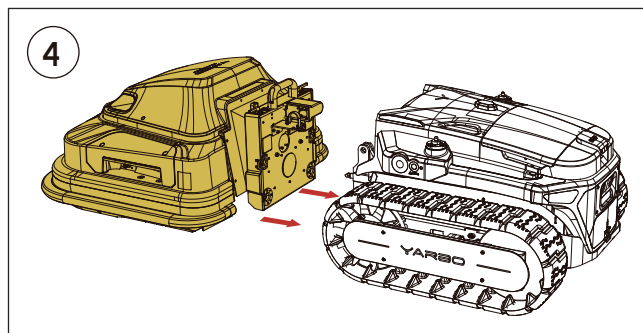


Pull the Lawn Mower Module close to the Yarbo Core by **grasping** the lifting holder on both sides, ensuring that the two parts are prepared closely enough to connect the cable.


3. Setup Guide

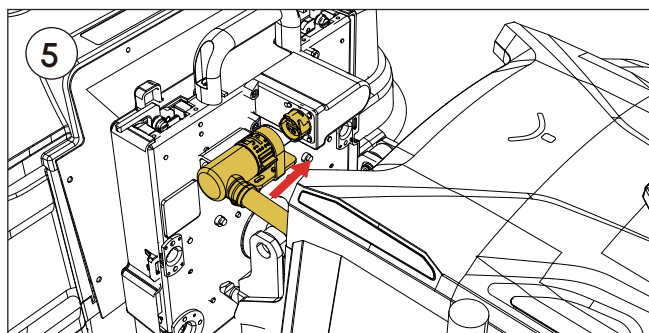


Carefully **insert** the cable into the port on the Lawn Mower Module, ensuring that both are properly aligned and securely connected.

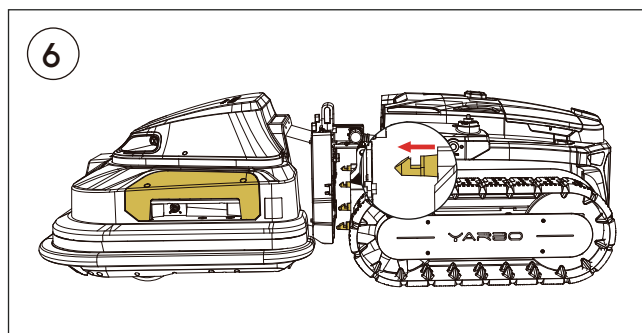


Lift the Lawn Mower Module by **grasping** the holder and **locate** the shafts and holes in the Yarbo Core and Lawn Mower Module. Slightly **push** the Lawn Mower Module towards the Yarbo Core after the proper alignment.

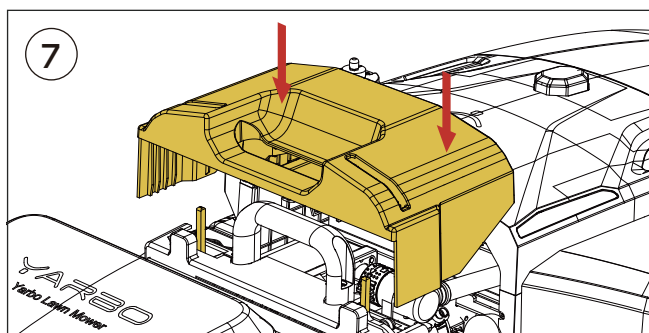


Lift the two locks on the sides. **Locate** the Plastic Connector Cover provided and **install** it onto the connection part of Lawn Mower.

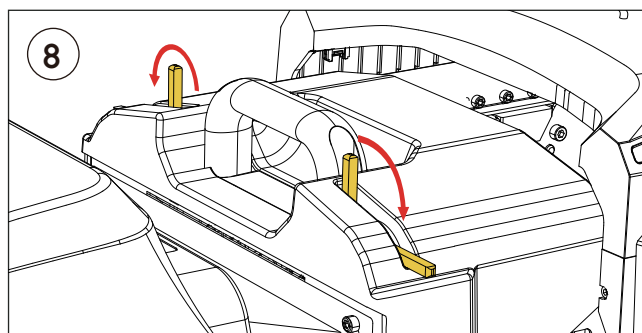

Push down the two locks on both sides.

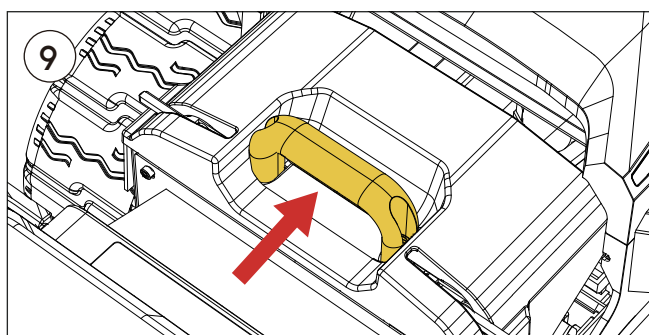


Push the connection part holder until you hear or feel a click.

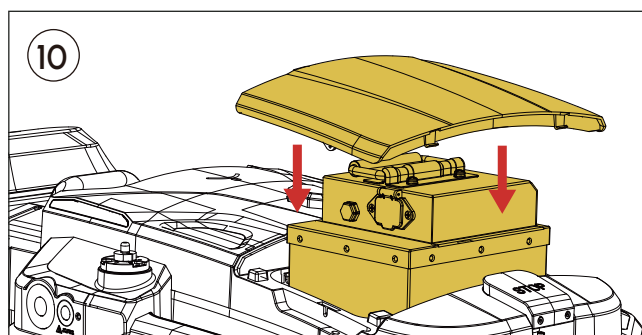


Lift the battery cover and **place** the battery into the battery cabin.


3. Setup Guide

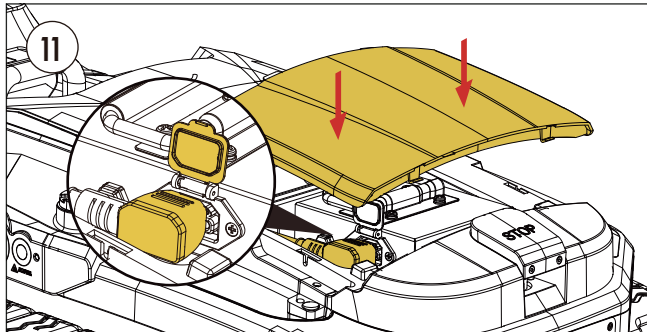


Remove the cover by grasping both sides with your hands and lifting. Place the battery inside the chamber and **connect** the cable from the Yarbo Core to the battery.

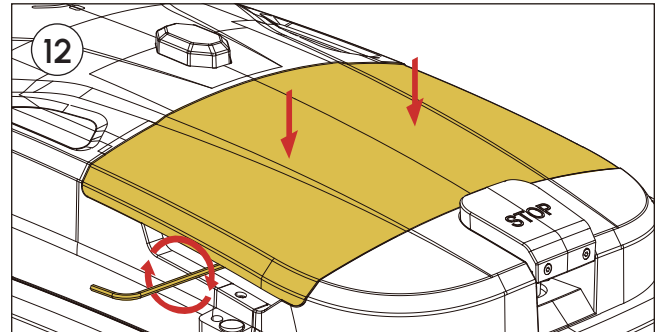


Replace the cover and **screw** the Anti-theft Bolts on both sides using Battery Cover Wrench provided in the package.

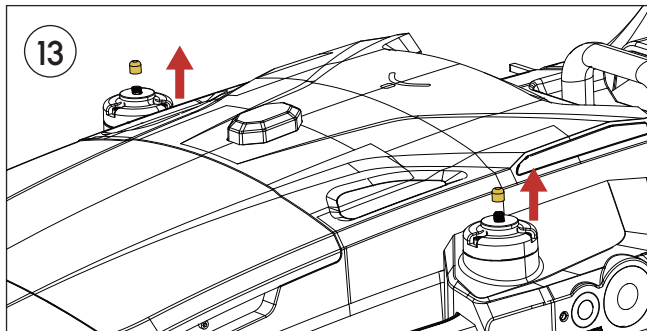


Locate the red screw caps on the RTK Antenna Mounts and **remove** them.

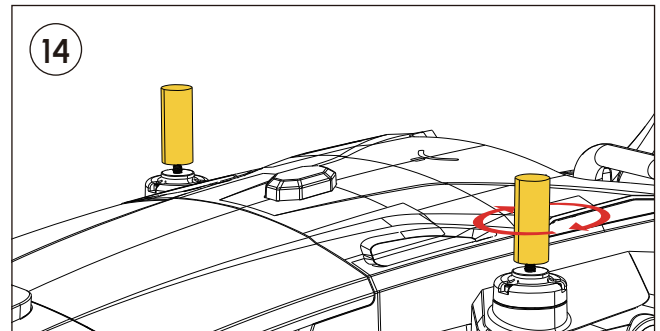

Locate the RTK Antenna for Rover and screw them on the RTK Antenna Mounts.

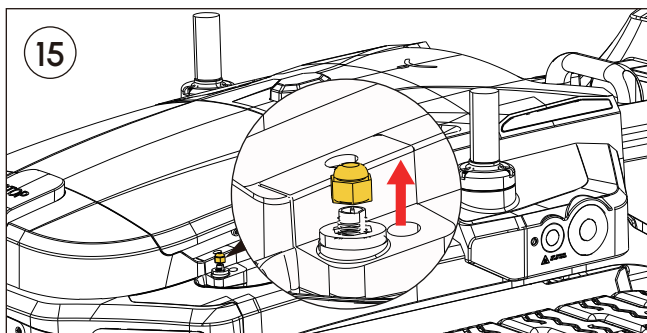


Remove the white screw cap on the HaLow Antenna Mount. Keep the black rubber ring in for waterproofing.

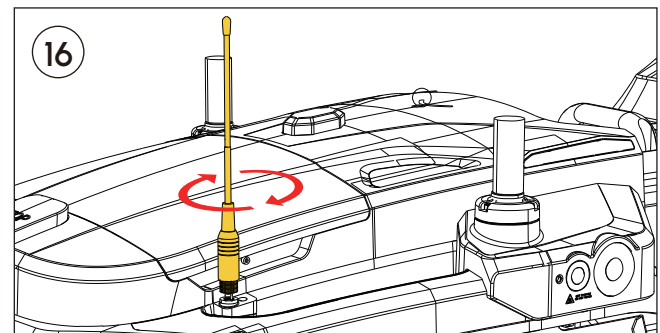


Locate the HaLow Antenna and screw the antenna into the HaLow Antenna Mount until hand tight.

3. Setup Guide

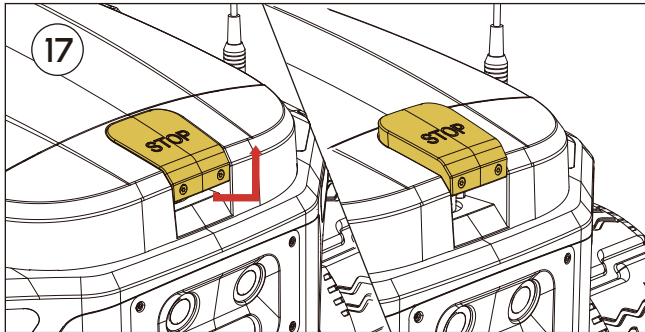

Lift the Emergency Stop Button.

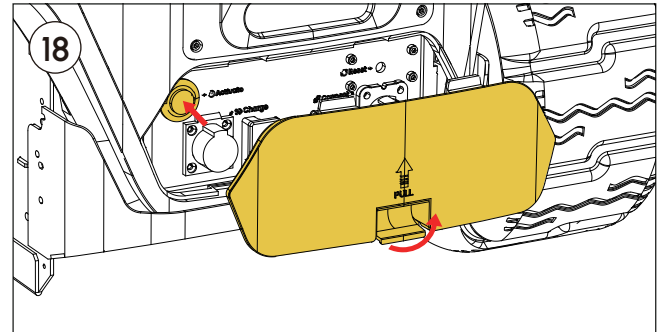

Remove the rear cover. **Press** the activate button to turn on Yarbo. **Place** back the rear cover.